

DESIGN GUIDE · BUDGET PRICING

ARTE KIDS PARK DENVER

Interior build-out intent for General Contractor budget pricing.

Companion to the Bill of Quantities.

6707 S. Vine St, Centennial, CO · Type A · Preliminary · October 2026 · Heights and finishes are design intent based on Arte Kids Park Jeju and Byeollae; final design by the Architect of Record.


BASIS & EXISTING BUILDING

How to read this guide with the BOQ, and what is on site today

Item	Existing condition (2008 permit set, verify in field)
Area	Approx. 30,500 SF (2,833 m2) zoned, single story
Clear to structure	18'-3" to 21'-0" (5.56 to 6.40 m); 18 ft minimum
Roof	Steel bar joists 28K at 5'-4" o.c. on joist girders
Floor	5" slab on grade, unreinforced
Condition	Vacant shell: carpet tile, structure painted white
Services	800A 480/277V; 10 rooftop units, approx. 111 tons

Document order

1. BOQ (Owner bid form): scope and quantities
2. This guide: heights, finishes, design intent
3. BOQ tabs: Finish Schedule, AMLA Projector Details

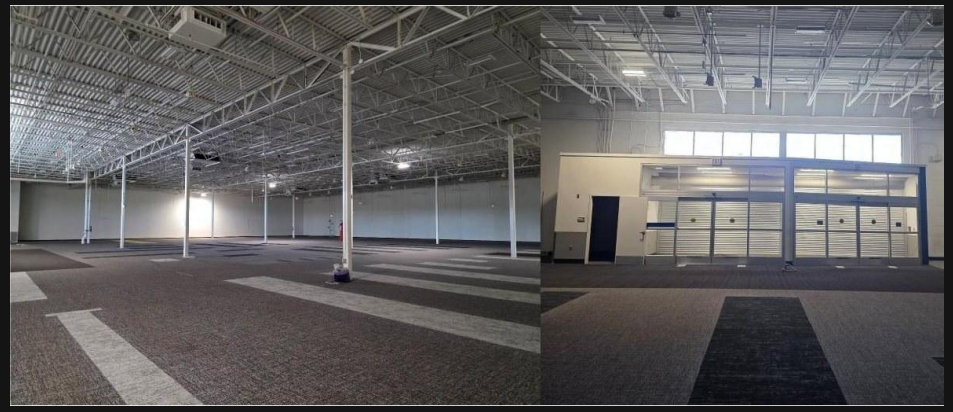


Schedule requirement

Interior work 75% complete at least 60 days before handover (dust-free), so the Owner can install projectors, displays and content (same as AMLA).

OVERVIEW · TYPE A

Owner Type A space plan with wall markup; areas are approximate take-offs from the markup


Zone	SF	m2	Share
Adventure	6,870	638	22.5%
Experience (3 rooms)	1,440	134	4.7%
Sand Beach	1,150	107	3.8%
Mission (11 booths)	1,700	158	5.6%
Trampoline + server	480	45	1.6%
F&B	2,410	224	7.9%
Party (4)	1,460	135	4.8%
Kitchen + restrooms	1,510	140	5.0%
Lobby, lockers, BOH	3,030	281	9.9%
Circulation, other	10,450	971	34.2%
Total	**30,500**	**2,833**	**100%**

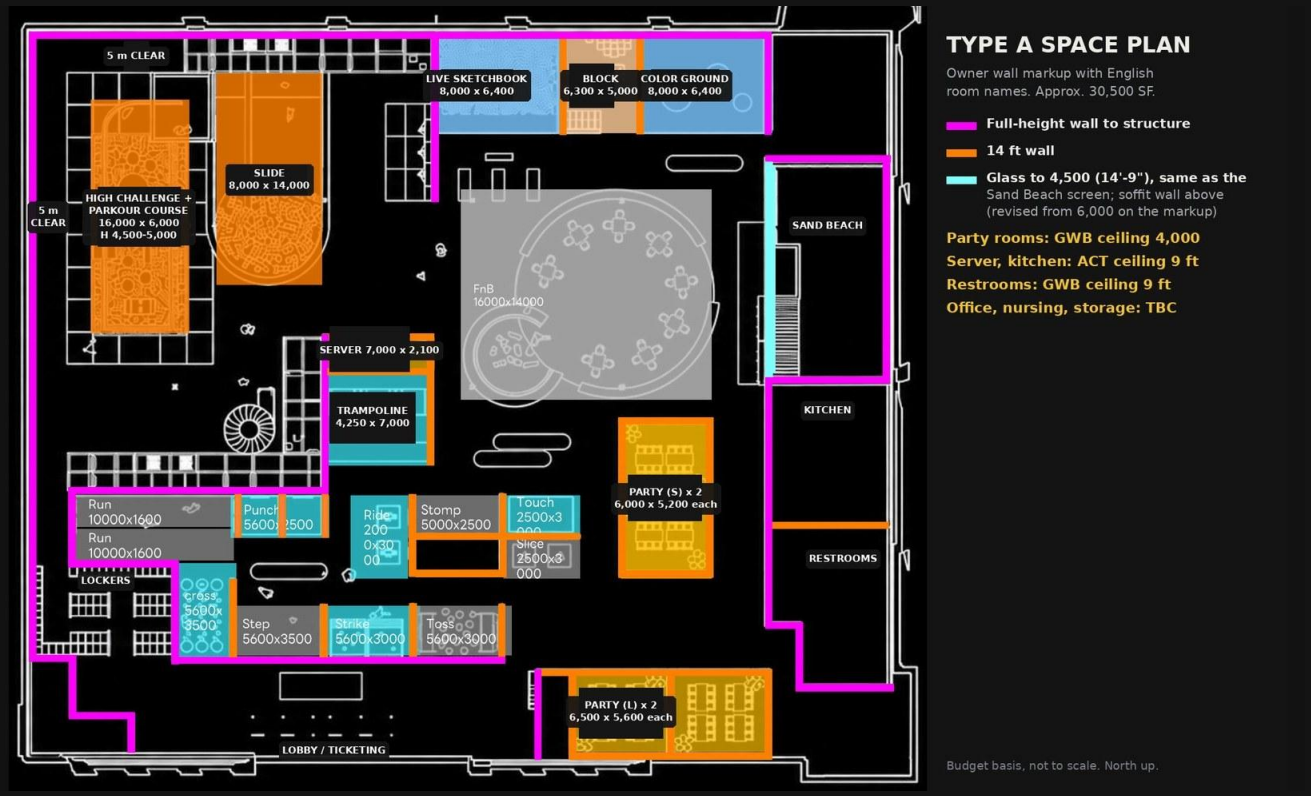

Magenta = full height to structure · Orange = 14 ft · Sky blue = glass to 4,500 (same as screen) with soffit above. Office, nursing and storage are not yet located (allowance in BOQ).

SCREEN HEIGHT & SEPARATION HEIGHT

Screen height = paint separation height: light gray projection paint on Level 5 below, matte black above

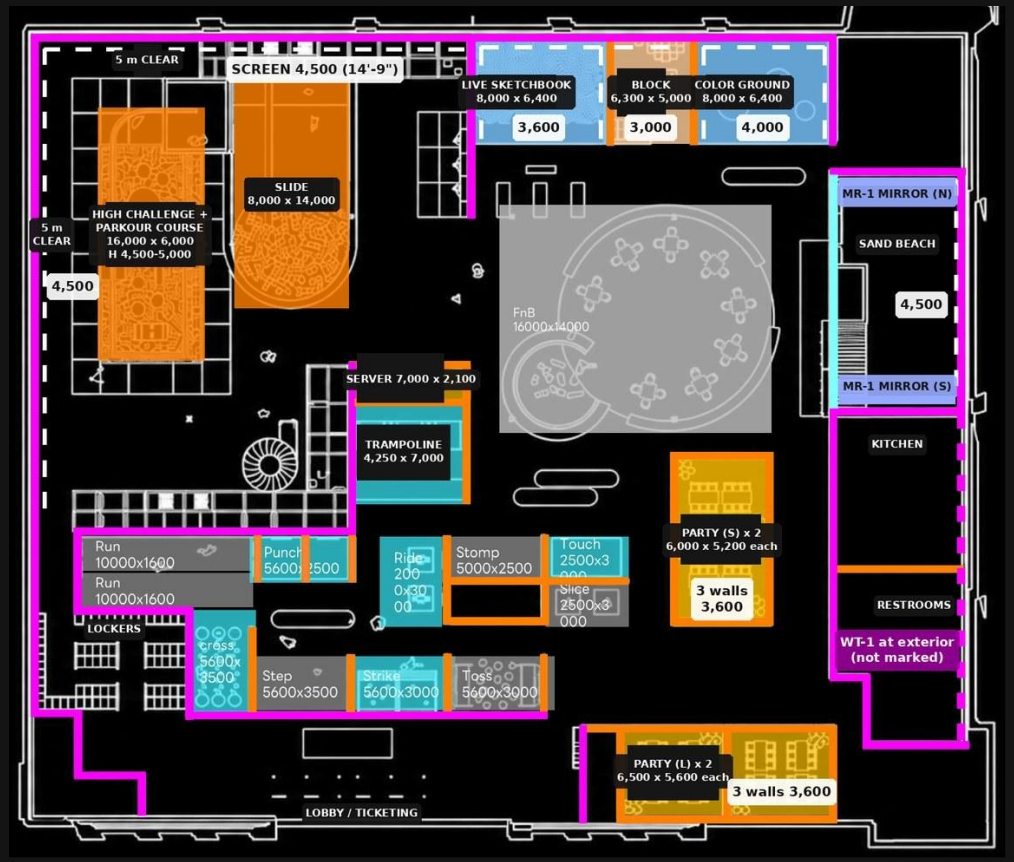

WALLS + SCREENS

Type A markup by Owner. Screen height = paint separation height: light gray below, black above.

- **WT-1 Full height to structure** along exterior walls: freestanding, room side only
- **WT-2 14 ft partition, braced** to structure
- **WT-3 Glass to 4,500 (14'-9") = screen** height; GWB soffit wall above to deck
- **Projection screen face and height** (Level 5 + screen paint)
- **MR-1 mirror wall to 4,500** (Sand Beach N + S, as Byeollae / Jeju)
- **WT-1 along exterior wall at kitchen** and restrooms (added by Owner rule)

Party rooms: GWB ceiling 4,000
Server, kitchen: ACT 9 ft
Restrooms: GWB 9 ft

Budget basis, not to scale. North up.

Zone	Height
Adventure	4,500 (14'-9") W + N
Sand Beach	4,500 E; mirror N + S
Color Ground	4,000 (13'-1") 3 walls + floor
Sketchbook	3,600 (11'-10") + 450 base
Block	3,000 (9'-10") 1 wall
Party rooms	3,600, 3 walls
Mission	DIDs in 14 ft walls

Keep at least 1,000 mm of black band above each screen for projectors and speakers. No outlets, devices or seams in a screen area. In Adventure the wall pads cover the lowest 5 ft.


HEIGHT REFERENCES


Screen heights built at Arte Kids Park Jeju and Byeollae, scaled to Denver's clear height

Zone (mm)	Jeju 2024	Byeollae 2026	Denver
Clear height	9,700	5,120	5,560 to 6,400
Adventure	7,000	None	4,500
Sand Beach	6,050	3,600	4,500
Color Ground	5,000	3,600	4,000
Sketchbook	4,825 + 450 base	2,900 + cushion	3,600 + 450 base
Black band above	2,200 to 3,650	approx. 1,500	1,000 minimum

Paint system (as built in Jeju and AMLA)

Screen: light gray matte projection paint (Jeju MC 2035 Slate; AMLA SW 7075 Web Gray) over Level 5. Above screen and structure: matte black (AMLA BM 2132-10).

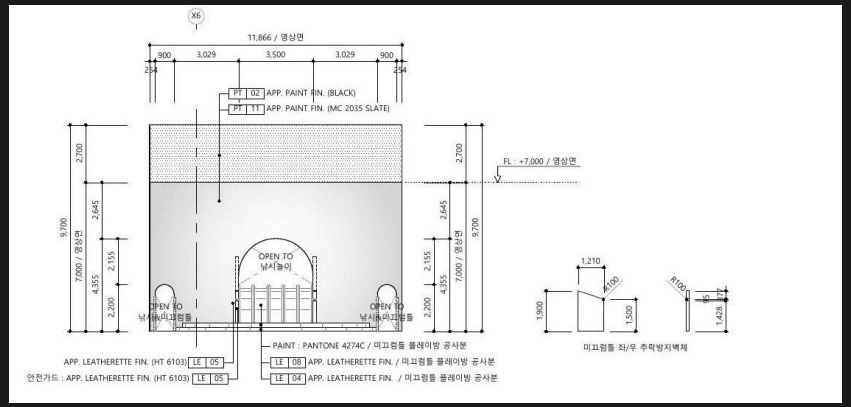


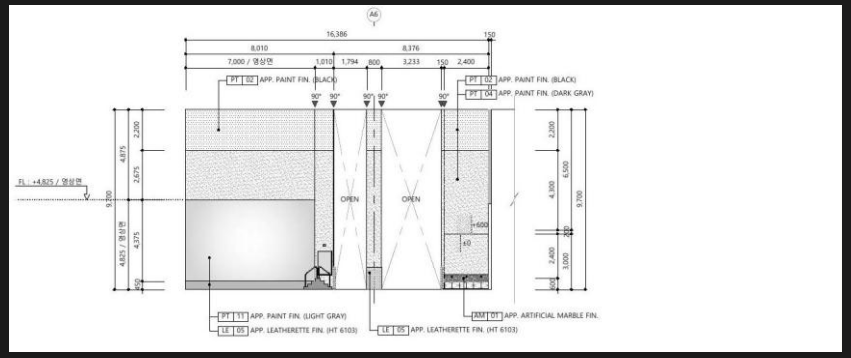

Jeju elevations EL-201 (plaza) and EL-405 (sketchbook)

WALL TYPES · TYPE A

Wall types follow the Owner markup colors; US metal stud construction as built at Arte Museum LA / NY

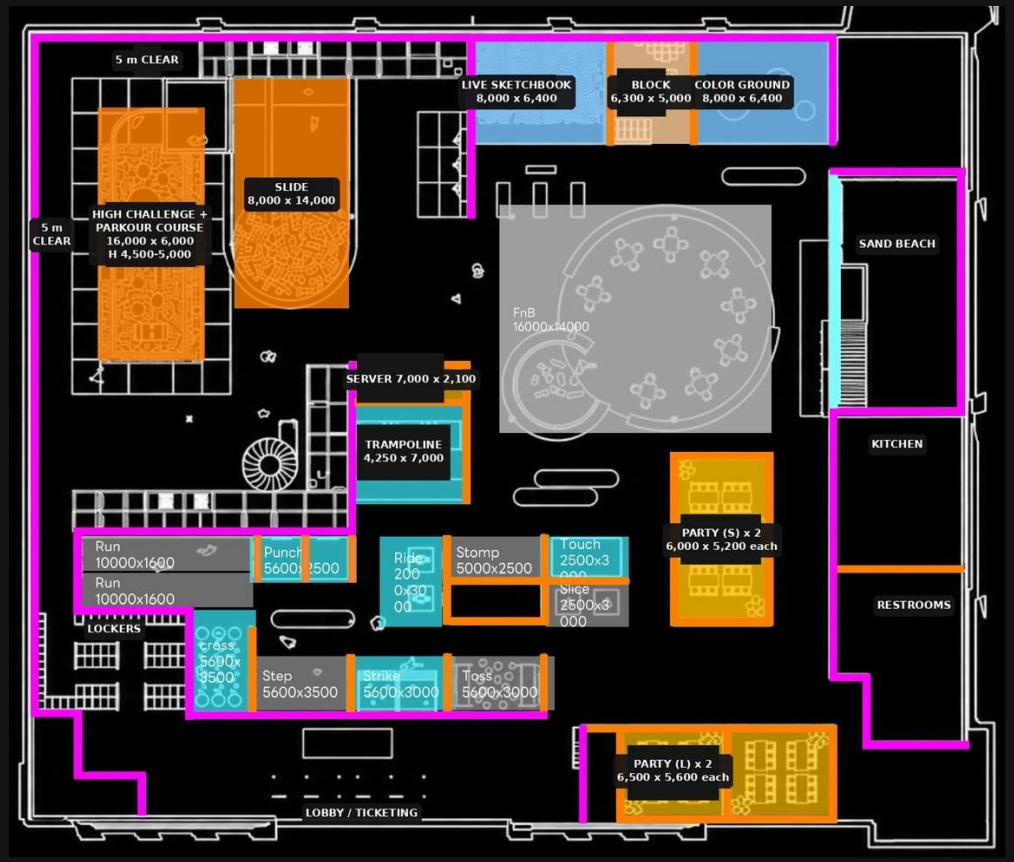

TYPE A SPACE PLAN

Owner wall markup with English room names. Approx. 30,500 SF.

- **Full-height wall to structure**
- **14 ft wall**
- **Glass to 4,500 (14'-9"), same as the** Sand Beach screen; soffit wall above (revised from 6,000 on the markup)

Party rooms: GWB ceiling 4,000
Server, kitchen: ACT ceiling 9 ft
Restrooms: GWB ceiling 9 ft
Office, nursing, storage: TBC

Budget basis, not to scale. North up.

WT-1 Full height (magenta)

To structure, approx. 21 ft. 6" metal studs, 2 x 5/8" GWB each side. At exterior walls: braced, room side only.

WT-2 14 ft (orange)

6" metal studs, 2 x 5/8" GWB each side, braced to structure. Experience dividers, booths, party rooms, kitchen / restroom.

WT-3 Glass + soffit (sky blue)

Low-iron safety glass to 4,500 (14'-9"), same as the Sand Beach screen, for a clear view in; GWB soffit wall above.

WT-4 Column wrap

12 exposed columns, 3-5/8" studs, full height; pad at base in play areas.


FINISH PLAN · WALL

Finish levels follow the Arte Museum LA bid form; screen paint per Byeollae PT-09 / Jeju

Code	Finish	Basis / level	Where
PT-3	Projection screen paint	Light gray matte, Level 5, up to screen height	All projection walls
PT-2	Matte black paint	Level 3; above screens, booths, corridors	Play and mission zones
SG-1	Supergraphic paint	2 to 3 colors, masked shapes	Mission booth walls
PT-1	Light paint	Level 4, warm white	Lobby, F&B, office, nursing
PT-4	Accent / wet-area paint	Level 4, scrubbable	Restrooms above tile, party
L1	Compound only, no paint	Level 1	Server, storage, BOH
PD-1	Wall pads, off-the-shelf	Nominal 5 ft panels, vinyl, Class A	Adventure, trampoline, Run lanes
LE-1	Padded screen base	Leatherette, 450 mm high	Under sketchbook screens
MR-1	Safety-backed mirror	Mirror wall to 4,500; shatterproof sheet low, stainless base (Byeollae / Jeju)	Sand Beach N + S
TL-W	Porcelain wall tile	Full height wet walls	Restrooms
FRP	FRP panels	Class A	Kitchen

FINISH PLAN · FLOOR

No epoxy and no hard floor in play areas: puzzle mats as at Byeollae and Jeju

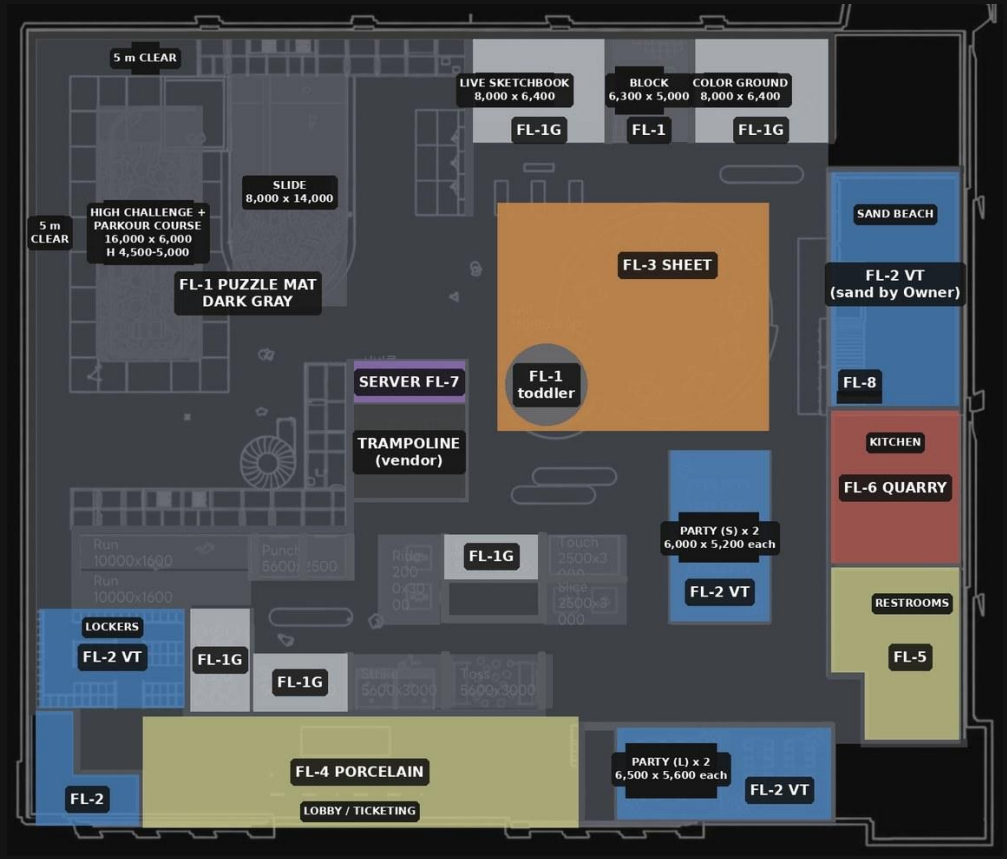

FLOOR FINISH PLAN

Type A. Basis: Arte Kids Park Byeollae and Jeju (no epoxy, no hard floor in play areas).

- **FL-1 Puzzle mat, dark gray** — 1 m x 1 m x 20 mm (3/4") EVA, loose-laid all play areas and circulation
- **FL-1G Puzzle mat, light gray** — floor projection: Sketchbook, Color Ground, Step, Cross, Stomp
- **FL-2 Vinyl tile (LVT)** — party rooms, lockers, BOH, Sand Beach base under sand
- **FL-3 Resilient sheet / linoleum** — F&B seating (Jeju basis)
- **FL-4 / FL-5 Porcelain tile** — lobby 24x48; restrooms
- **FL-6 Quarry tile, kitchen**
- **FL-7 Static-dissipative tile, server**
- **FL-8 Sand exit mat, aluminum frame** with EPDM inserts (Byeollae)


Budget basis, not to scale. North up.

Code	Finish / where
FL-1	Puzzle mat, dark gray, 1 m x 1 m x 20 mm, loose-laid: play areas, circulation(open for recs.)
FL-1G	Same, light gray: Sketchbook, Color Ground, Step, Cross, Stomp
FL-2	Vinyl tile: party, lockers, BOH, base under sand
FL-3	Sheet / linoleum: F&B seating
FL-4/5	Porcelain: lobby 24x48; restrooms
FL-6/7	Quarry tile kitchen; static-dissipative server
FL-8	Sand exit mat, aluminum frame + EPDM

Mats must pass ASTM D2859 and the floor class the AHJ requires in exit paths. Vinyl tile under the mats is priced as ALT-1.

FINISH PLAN · CEILING

Paint the whole deck black first, then build the few ceilings the markup calls for

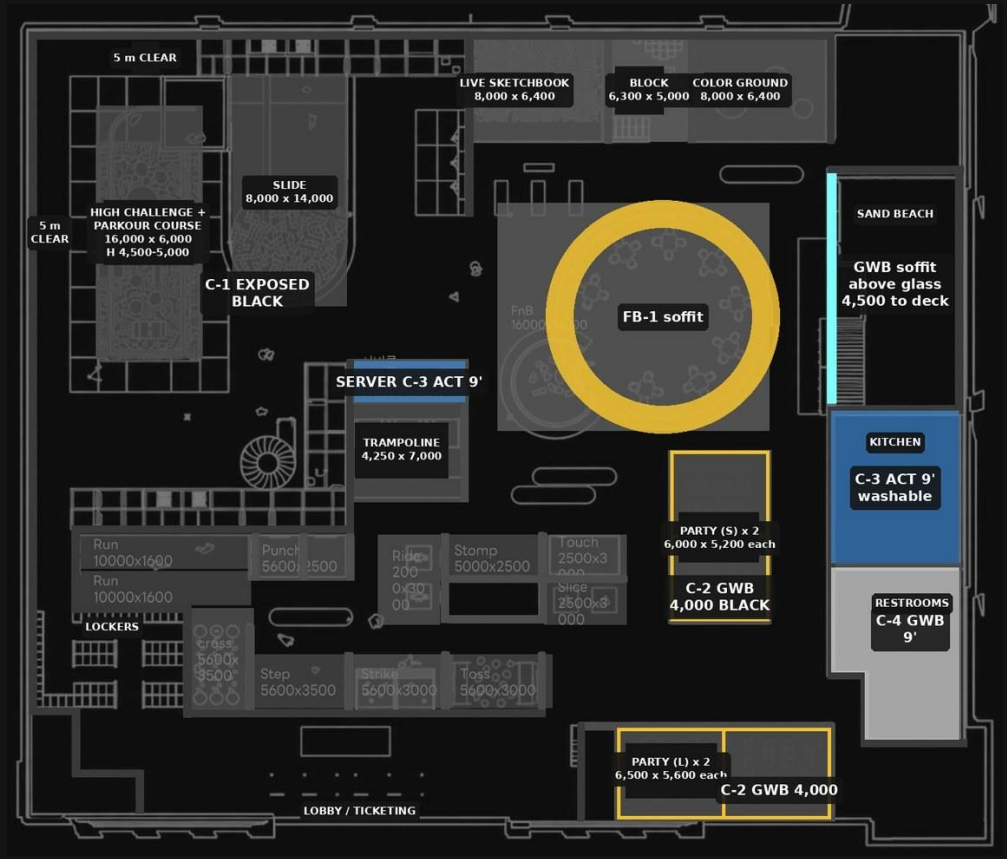

REFLECTED CEILING PLAN

Type A. Paint the whole deck black first (no masking), then build the new ceilings.

- **C-1 Exposed structure, dry-fall black** entire space incl. above new ceilings
- **C-2 GWB ceiling at 4,000 (13'-1"),** painted black: party rooms (4)
- **C-3 Acoustic tile at 9'-0": server;** kitchen in washable vinyl-faced tile
- **C-4 Moisture-resistant GWB at 9'-0":** restrooms
- **FB-1 Curved GWB soffits with LED** cove in F&B (allowance)
- **Glass wall to 4,500 (14'-9"), same as** screen; GWB soffit above to deck

All lighting dimmable, see Lighting

Budget basis, not to scale. North up.

Code	Ceiling	Height
C-1	Exposed, dry-fall black, entire deck	Open
C-2	GWB black, party rooms	4,000 (13'-1")
C-3	ACT: server; kitchen washable	9'-0"
C-4	MR GWB, restrooms	9'-0"
~~FB-1~~	~~F&B curved soffits, LED cove~~	~~Below deck~~

One continuous spray for the black deck, no masking. Above the Sand Beach glass (4,500) a black GWB soffit wall closes to the deck.

Ignore FB-1 for now

LIGHTING · ALL DIMMABLE

Unlike Arte Museum, the lights stay ON during operation; each zone is dimmed to the level set on site

Type	Fixture	Where
LT-1	Black spot, approx. 30W, 4000K, narrow beam	Open play areas
LT-2	6" downlight, approx. 20W	Lobby, party, BOH
LT-3	3" COB downlight, 10 to 15W	Lockers, restrooms, office
LT-4	LED strip / cove	F&B soffits, booth slots
LT-5	Linear LED (T5 type)	Restrooms, kitchen, BOH
LT-6	High-output cleaning light	Play areas, after hours

Dimming

Every fixture dimmable (0-10V to 1% or DALI), flicker-free LED, 4000K (Byeollae basis).

Scenes

Zone dimming with presets at the front desk: open, operation, cleaning.

Screens


Narrow beams aimed off projection walls; no spill on screens.

Egress

Min. 1 fc on the egress path kept when dimmed (IBC 1008).

PROJECTOR & SPEAKER SUPPORT

Built to the Arte Museum LA approved detail (S1.32/4, Rev. 4); GC frame and plate, Owner mounts

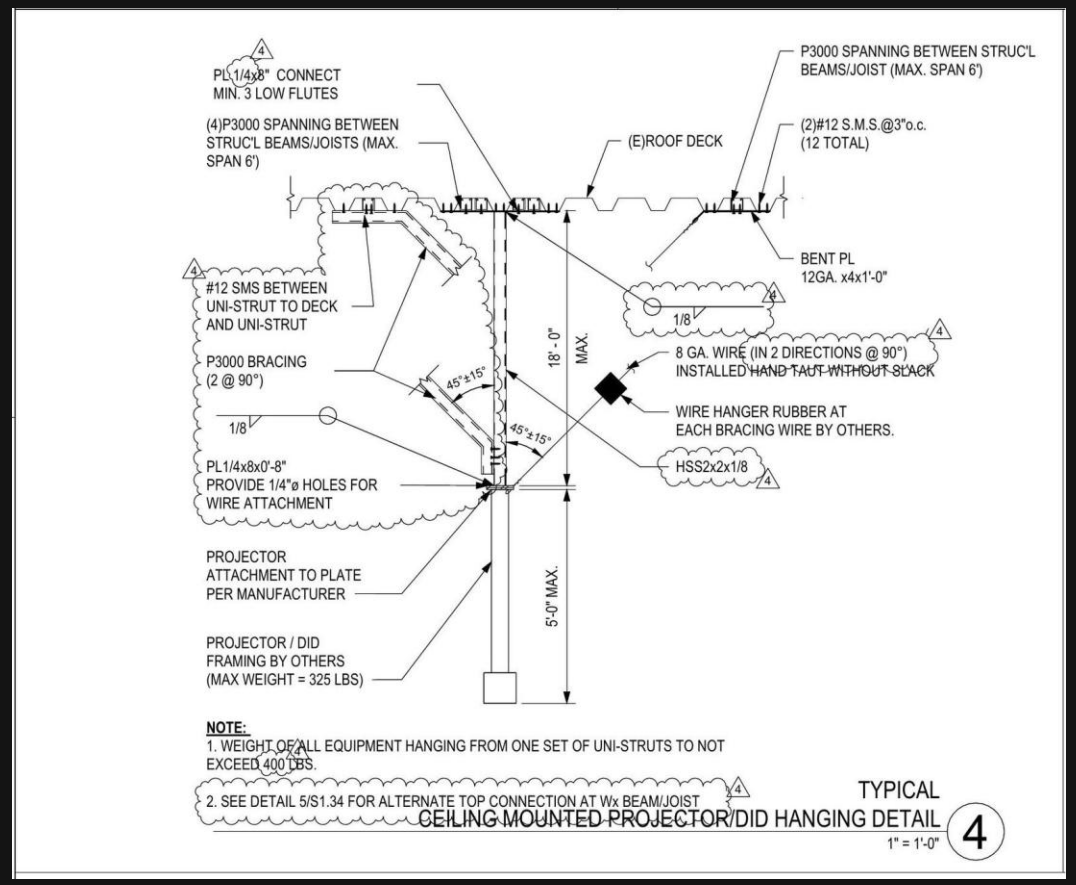

Item (Owner Equipment Loads)	Qty	Weight
Projectors, open ceiling	33	up to 122 lb
Projectors, party rooms	8	up to 122 lb
Speakers and subwoofers	45	66 to 88 lb

(4) Unistrut P3000 across joists, max. 6 ft span; PL 1/4 x 8 to deck at 3 low flutes; HSS 2x2x1/8 drop, price on 17 ft; P3000 braces 2 ways; 8 GA sway wires; 400 lb per set.
Hang at joist panel points; off a panel point, add angle per S1.32/6.
Denver structural engineer to confirm joist capacity.


DID, SENSORS, SCENT & CABLE TRAY

Installation standards carried over from Arte Museum LA; devices furnished by the Owner

Item	GC requirement	Quantity / where
DID outlet	2-gang, 70 mm (2.75") above the DID top edge, hidden behind it	Each DID
DID backing	4' x 8' 1/2" FRT plywood in the wall	Each DID
Wall devices	Speaker / projector backing per AMLA S1.32/3, up to 200 lb	Per HW plan
Sensors	Wiring and boxes only: on full walls, low walls, projector brackets	Interactive zones
Scent diffuser	Drill wall, install 18 mm metal hose and outlet; unit by Owner	Approx. 10
Cable tray	Double layer, power and communications, from server rooms	All media zones
HW power	Dedicated circuits; approx. 76 kW total equipment (see BOQ tab)	All projectors, DIDs, PCs

CHILD SAFETY · WALL PADS

Off-the-shelf wall pads about 5 ft high on every non-projection wall in the exhibition areas

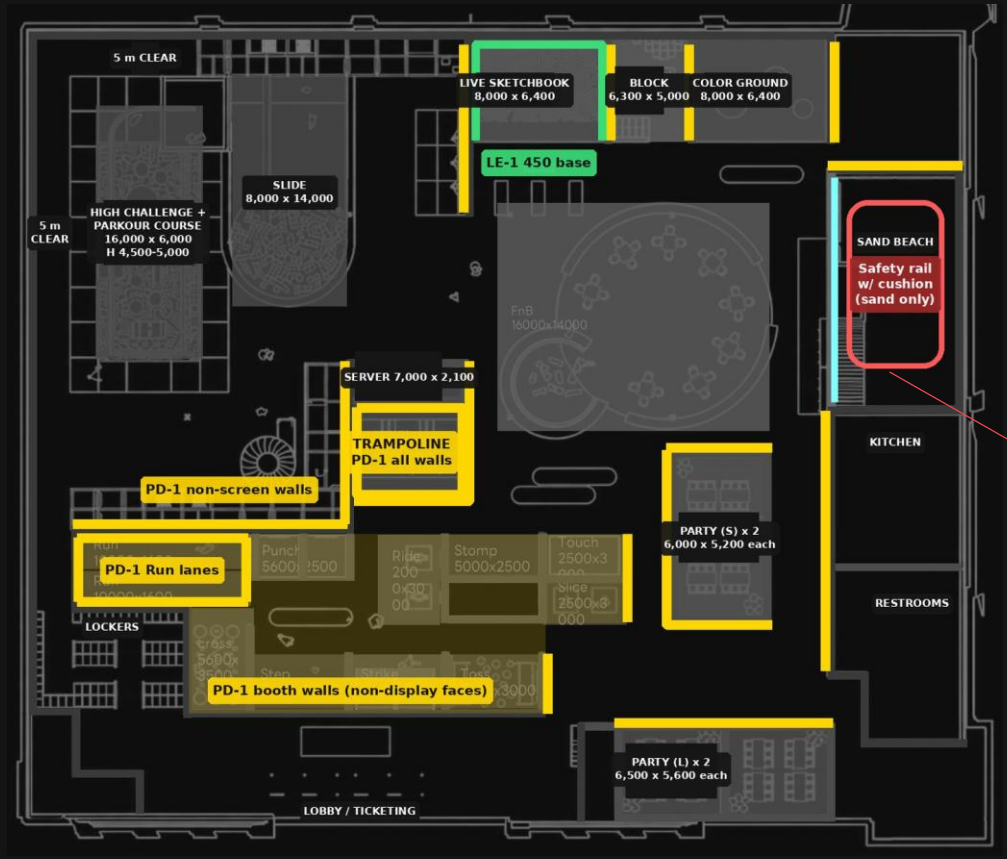

CHILD SAFETY PLAN

Type A. Wall pads on every wall in the exhibition areas that is not a projection or mirror wall.


- **PD-1 Wall pads, off-the-shelf** nominal 5 ft panels (std. 5' or 6'), 2" foam, vinyl cover, Class A, mounted 2-4" above floor
- **PD-1 also on booth walls** (faces without displays)
- **LE-1 Padded base 450 mm under** Sketchbook screens (Jeju)
- **Safety rail with cushion cover,** Sand Beach only (Byeollae ETC-03)
- **Glass wall: safety glazing** (CPSC Cat. II) + visibility band

Also: column pads (12), padded corner guards, finger-pinch guards

Budget basis, not to scale. North up.


Item	Where / qty
PD-1 pads	All non-projection walls in exhibition / play areas, approx. 920 LF
PD-2	Column pads, 12 columns
LE-1	450 padded base, Sketchbook
Safety rail	Sand Beach only, approx. 100 LF
Safety bar	Cushion cover on the Sand Beach rail

Pads: standard 5 ft (or 6 ft) panels, 2" foam, vinyl cover, Class A, dark color. Also: corner guards, finger-pinch guards, safety glass and mirror, tamper-resistant receptacles.

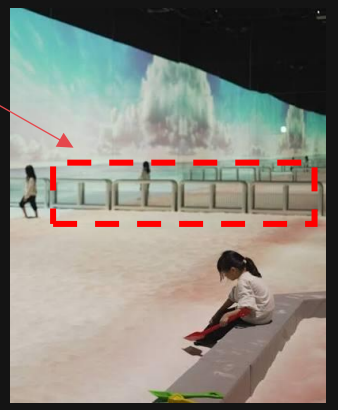

SPACE DESIGN · ADVENTURE

Two-face media facade with large slides and high challenge course (Type A, selected)

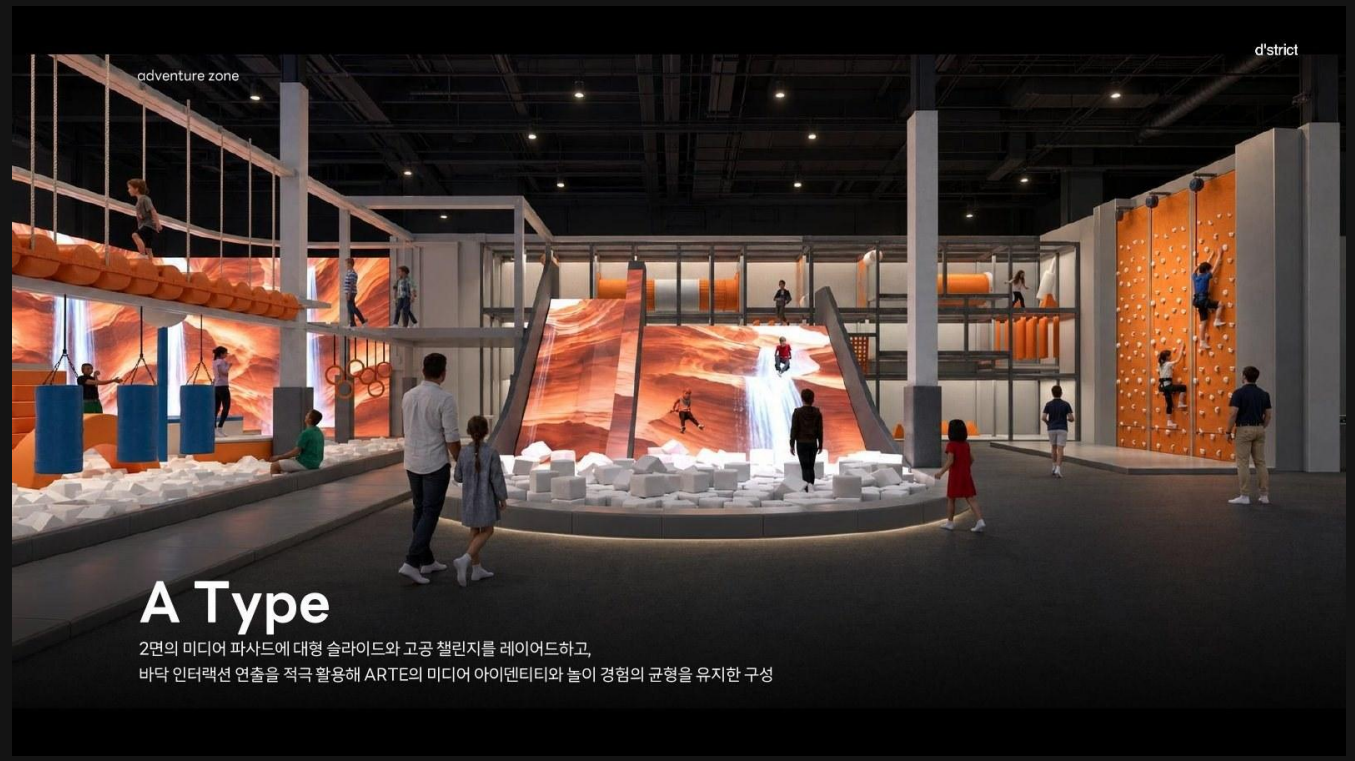




Course 16,000 x 6,000, H 4,500 to 5,000; slide 8,000 x 14,000; 5 m gap to the projection walls (Owner plan).

ADVENTURE · GC SCOPE

What the interior contractor builds around the vendor play structure

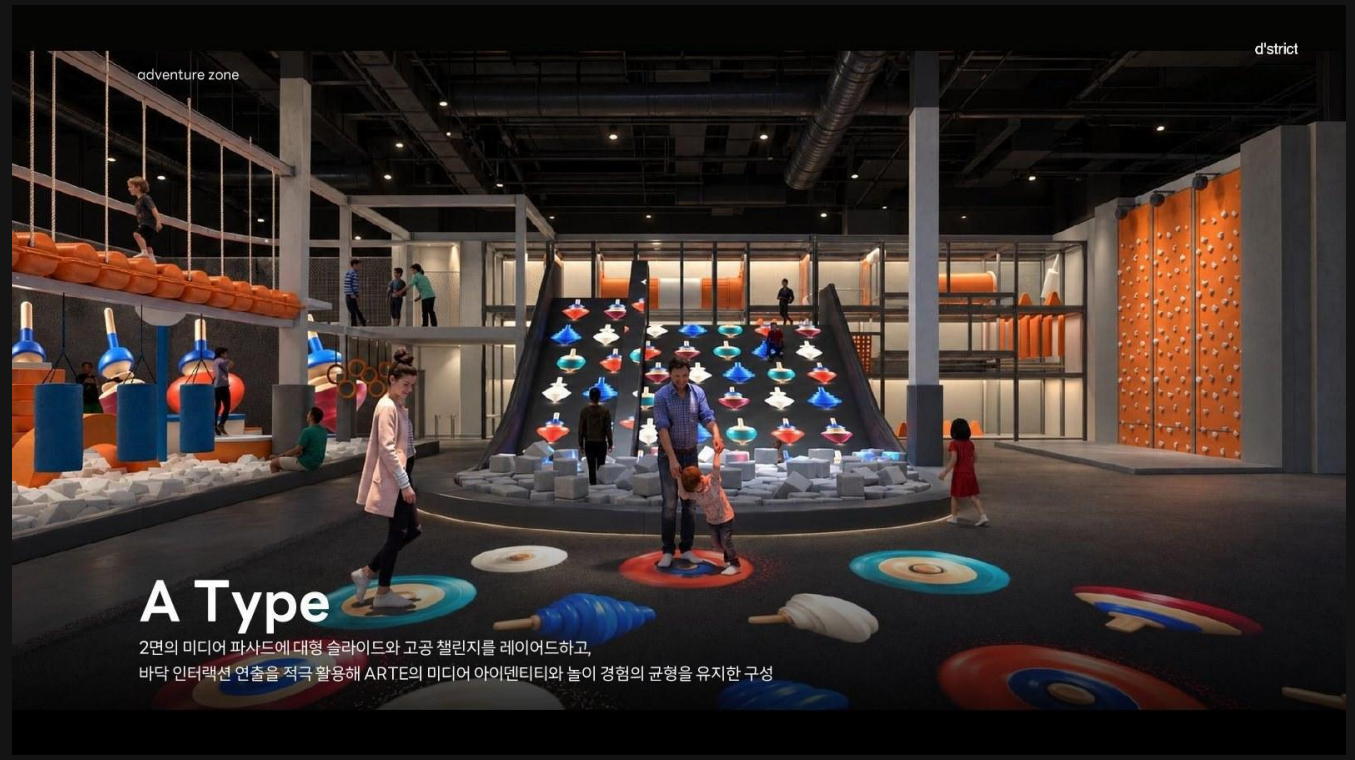

Walls

W + N full-height walls, screen paint to 4,500, black above; 5 ft wall pads around the zone.

Floor

FL-1 puzzle mat, dark gray; foam pit and safety surfacing under the structure by vendor.

Power and data

LED towers, tagging points, photo kiosks, projectors and sensors.

Alternate

Play structure footing pads priced as ALT-3; sprinklers under wide decks per vendor layout.

SPACE DESIGN · MISSION ZONE (1)

12 game booths built around portrait displays; walls and backing by GC







Booth walls

WT-2, 14 ft high. Dark gray matte with supergraphic circles (SG-1). Vertical LED slots between displays.

Displays

55 to 75" portrait DIDs, flush in the wall. FRT plywood backing and outlet at each display.

Impact

Padded walls at Punch and Strike. Trampoline room 4,250 x 7,000, all walls padded.

SPACE DESIGN · MISSION ZONE (2)

Floor games and the running lane





Floor

Puzzle mat FL-1; light gray FL-1G at Step, Cross, Stomp.

Run lane

5 ft wall pads on side and end walls (PD-1); touch panels by vendor.

By vendor

Pads, troughs, bikes; GC gives backing, power, data.

SPACE DESIGN · SAND BEACH

Projected sea on one wall, mirrors on two, real sand play



Walls

E wall screen to 4,500; N + S mirror walls to 4,500 with shatterproof sheet low and stainless base (as Byeollae / Jeju).

Floor

Vinyl tile under sand; aluminum / EPDM exit mat (Byeollae). Sand and toys by Owner.

Safety and cleaning

Cushioned safety bar around the sand; west face is low-iron safety glass to 4,500 (same as the screen) with a soffit wall above.

SPACE DESIGN · EXPERIENCE ROOMS

Wall and floor projection rooms for younger children



Sketchbook

3 walls to 3,600 on a 450 padded base, plus light gray mat floor. Scan tables by Owner.



Color Ground

Walls to 4,000 plus floor. Light gray puzzle mat, no devices on screens.




Block

One interactive wall to 3,000. Puzzle mat; blocks and tables by Owner.

SPACE DESIGN · PARTY ROOMS

Four private rooms with immersive birthday projection

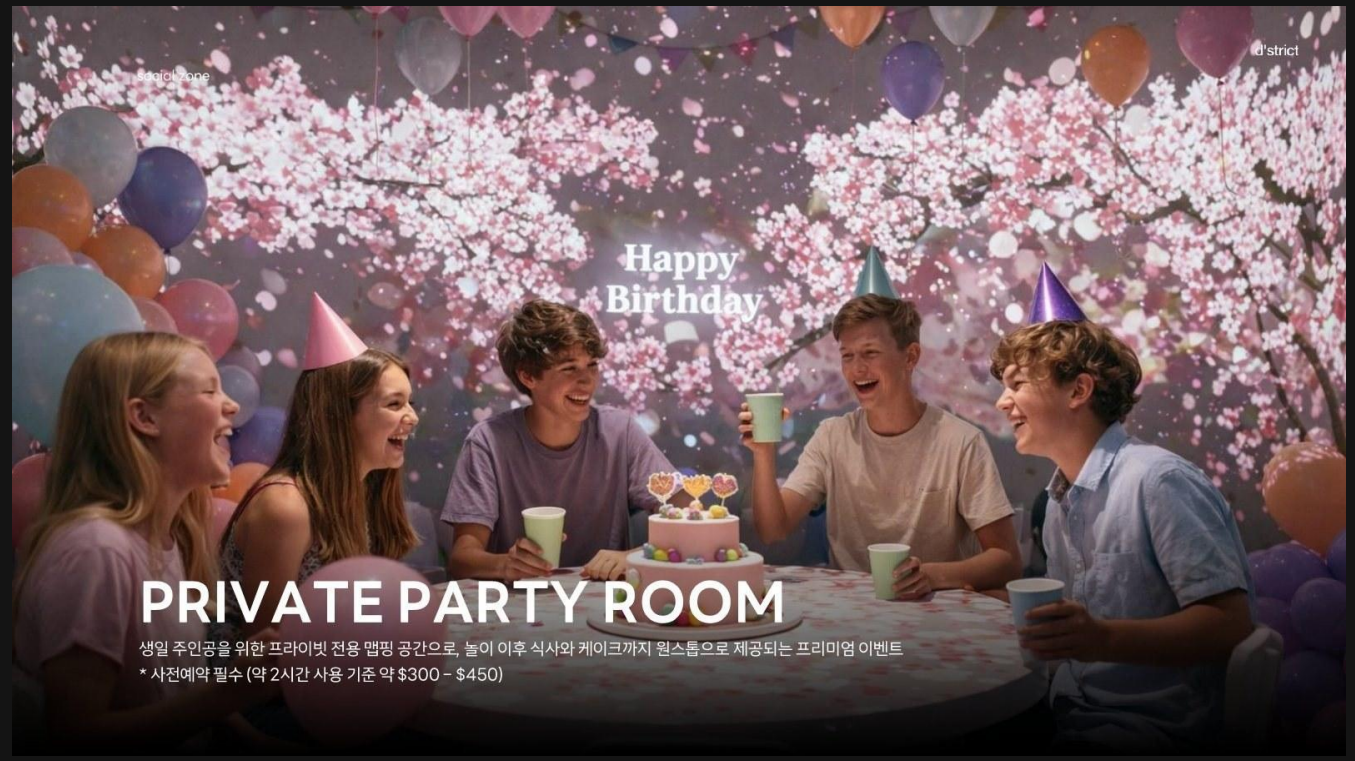

Rooms

2 at 6,000 x 5,200 and 2 at 6,500 x 5,600; 14 ft walls with sound batts.

Screens and ceiling

3 walls to 3,600; black GWB ceiling at 4,000; projector hung above it.

Door and floor

Solid-core door with vision lite and finger guards; vinyl tile floor.

SPACE DESIGN · F&B

The one bright, warm room: parents rest while toddlers play



Ceiling

Curved GWB soffits with LED cove (FB-1), hung below the black deck.

Walls and columns

Warm white paint; wood-look slats at columns and feature walls.

Toddler zone

Puzzle mat island on a sheet floor; play pieces by Owner.

Kitchen

New, all-electric, no gas; counter installed by GC.